

RECTIFIER TYPE 1D.5

The 1D.5 is an indirectly heated half-wave rectifier suitable for use in A.C. or universal receivers.


The electrodes are arranged so that very little voltage drop occurs in the valve, a most important point in rectifiers designed for use in this type of receiver.

The design is such that no hum is introduced into the circuits by the heater, while the heater cathode insulation is capable of withstanding a considerably greater voltage than is likely to be experienced in receivers for which it is designed.

The valve is fitted with a five-pin base, connections being as shown on page 51.

BRIMAR

CHARACTERISTICS

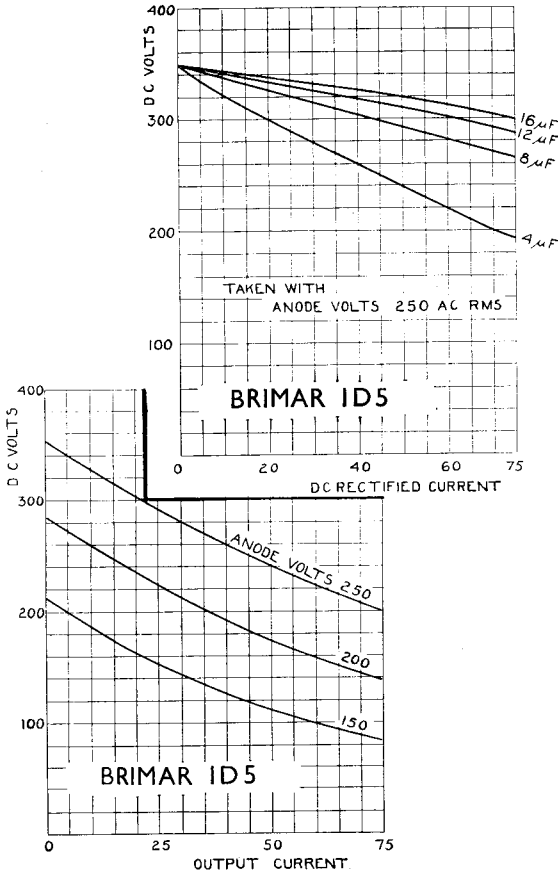


Heater Voltage	40 volts
Heater Current	0.2 amps.
Maximum Input Voltage	250 volts, R.M.S.
Rectified Current	75 m.a.

VALVES

BRIMAR

BASE CONNECTIONS OF VALVES

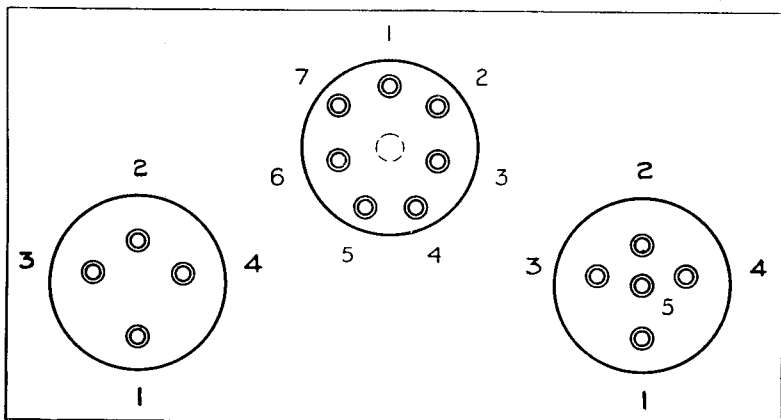

UNDERSIDE VIEW OF BASES
4-PIN VALVES

TYPE	1	2	3	4
HLB.1, PB.1	A	G	F.M	F
R.1, R.2, R.3, 1A.7	A1	A2	H	H.C
4037A.	A	—	F	F

5-PIN VALVES

TYPE	1	2	3	4	5	Top Cap
8A.1, 9A.1 ...	G2	G1	H	H	C.M	—
HLA.2, PA.1 ...	A	G	H	H	C.M	—
PenB.1, PenA.1 ...	A	G1	F	F	G2	—
4039A ...	A	G	H	H	C	—
ID5 ...	A	—	H	H	C	—

7-PIN VALVES

TYPE	1	2	3	4	5	6	7	Top Cap
4D.1 ...	—	—	—	H	H	C	A	G
7A.3, 7D.8, 7D.6, 7A.2, & 7D.3 ...	—	G1	G2	H	H	C	A	—
9D.2 ...	—	A	G3	H	H	C	G2	G1
11A.2, 11D.3	D1	M	D2	H	H	C	A	G1
15A.2, 15D.1	G2	G1	G3.G5	H	H	C	A	G4

A. Anode. G1, G2, G3, G4, 1st, 2nd, 3rd and 4th Grids.
F. Filament. H. Heater. C. Cathode. D1, D2, Diodes.
M. Metallising.

VALVES