

Beam Power Tube

NOVAR TYPE

For TV Horizontal-Deflection-Amplifier Applications

GENERAL DATA

Electrical:

Heater Characteristics and Ratings:

| | | |
|---|-----------------------|-------|
| Voltage (AC or DC) | 6.3 ± 0.6 | volts |
| Current at heater volts = 6.3 | 1.200 | amp |
| Peak heater-cathode voltage: | | |
| Heater negative with respect to cathode | 200 max. | volts |
| Heater positive with respect to cathode | 200 ^a max. | volts |

Direct Interelectrode Capacitances

(Approx.):^b

| | | |
|--|------|----|
| Grid No.1 to plate | 0.26 | pf |
| Grid No.1 to cathode & grid No.3, grid No.2, and heater | 15.0 | pf |
| Plate to cathode & grid No.3, grid No.2, and heater | 6.5 | pf |

Characteristics, Class A₁ Amplifier:

| | | Triode Con- nec- tion ^c | | |
|--|------------------|---|-------|-------|
| Plate Voltage | 60 | 250 | 150 | volts |
| Grid-No.2 Voltage | 150 | 150 | 150 | volts |
| Grid-No.1 Voltage | 0 | -22.5 | -22.5 | volts |
| Amplification Factor | - | - | 4.4 | |
| Plate Resistance (Approx.) | - | 15000 | - | ohms |
| Transconductance | - | 7100 | - | μmhos |
| Plate Current | 390 ^d | 70 | - | ma |
| Grid-No.2 Current | 32 ^d | 2.1 | - | ma |
| Grid-No.1 Voltage (Approx.) for plate ma. = 0.1 | - | -42 | - | volts |

Mechanical:

| | |
|---|---|
| Operating Position | Any |
| Type of Cathode | Coated Unipotential |
| Maximum Overall Length | 3.410" |
| Maximum Seated Length | 3.030" |
| Length, Base Seat to Bulb Top (Excluding tip) | 2.510" to 2.690" |
| Diameter | 1.438" to 1.562" |
| Bulb | T12 |
| Socket | Cinch Mfg. Co. No. 149 19 00 033, Industrial Electronic Hardware Co. No. S0-0968-SL1, or equivalent |
| Base | Large-Button Novar 9-Pin (JEDEC No. E9-76) |


← Indicates a change.



6GT5

Basing Designation for BOTTOM VIEW. 9NZ

Pin 1 - Grid No.2
Pin 2 - Grid No.1
Pin 3 - Cathode,
Grid No.3
Pin 4 - Heater



Pin 5 - Heater
Pin 6 - Grid No.1
Pin 7 - Grid No.2
Pin 8 - Do Not Use
Pin 9 - Plate

HORIZONTAL-DEFLECTION AMPLIFIER

Maximum Ratings, Design-Maximum Values:

*For operation in a 525-line, 30-frame system**

| | | |
|---|-----------|-------|
| DC PLATE-SUPPLY VOLTAGE | 770 max. | volts |
| PEAK POSITIVE-PULSE PLATE VOLTAGE ^f | 6500 max. | volts |
| PEAK NEGATIVE-PULSE PLATE VOLTAGE | 1500 max. | volts |
| DC GRID-No.2 (SCREEN-GRID) VOLTAGE. | 220 max. | volts |
| DC GRID-No.1 (CONTROL-GRID) VOLTAGE | -55 max. | volts |
| PEAK NEGATIVE-PULSE GRID-No.1 VOLTAGE | 330 max. | volts |
| CATHODE CURRENT: | | |
| Peak. | 550 max. | ma |
| Average | 175 max. | ma |
| GRID-No.2 INPUT | 3.5 max. | watts |
| PLATE DISSIPATION ^g | 17.5 max. | watts |
| BULB TEMPERATURE (At hottest point on bulb surface). | 240 max. | °C |

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For grid-resistor-bias operation. 1 max. megohm

^a The dc component must not exceed 100 volts.

^b without external shield.

^c with grid No.2 connected to plate.


^d This value can be measured by a method involving a recurrent wave form such that the maximum ratings of the tube will not be exceeded.

^e As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.

^f This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^g An adequate bias resistor or other means is required to protect the tube in the absence of excitation.



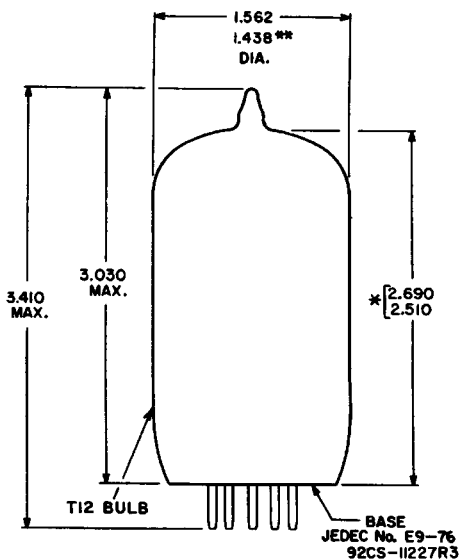


ALL DIMENSIONS IN INCHES

- ** APPLIES IN ZONE STARTING 0.375" FROM BASE SEAT.
- * MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY A RING GAUGE OF 0.600" INSIDE DIAMETER.



6GT5

AVERAGE CHARACTERISTICS

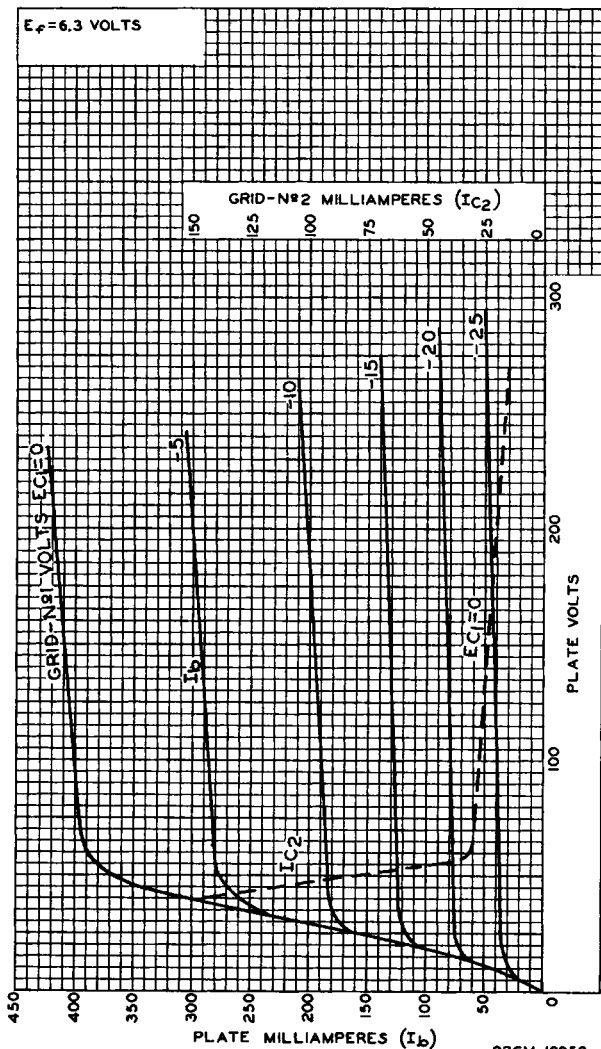

92CM-10859