

—Standard Valves—

4013-A
Fuse

4013-A FUSE

VACUUM MICRO FUSE.

The 4013-A Fuse consists of a nickel wire in an evacuated glass bulb. It is intended to blow on currents ranging from 18 to 25 milliamps.

Safe Current.

11 milliamps for 1 hour.
or 5 milliamps for an indefinite period.

Resistance.


45—55 ohms.

Dimensions.

Overall length	2" (5.1 cms.)
Maximum diameter	$\frac{1}{4}$ " (0.6 cms.)
Net weight	0.01 lbs. (5 gms.)

Base.

Edison miniature screw base.

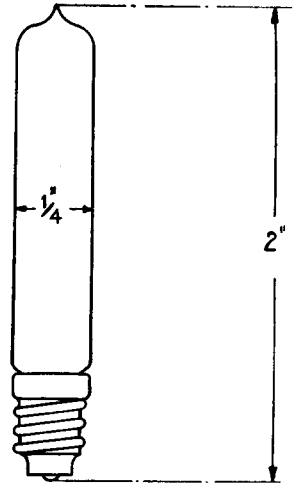

Note :—Orders for special fuses may be placed. Quotations will be sent on request.

PRINTED IN
ENGLAND